
SPC VINYL WALL CLADDING

DUNE
CLICK&FLOOR

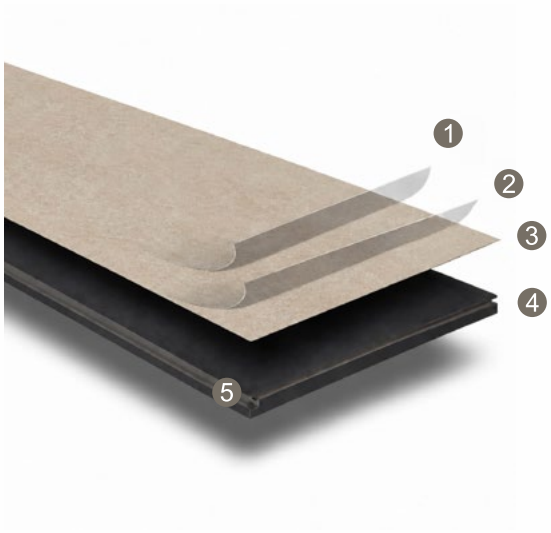

1. **The UV layer.** To protect the color fade, light anti scratches, and achieve a super matte surface.
2. **Wear layer,** Mainly protecting the color film from scratches.
3. **Deep structured decorative layer**
   Realistic designs are printed in high resolution, creating a unique natural style.
4. **SPC core board,** stone powder and plastic powder composite. 100% waterproof, with excellent stability.
5. **T&G lock,** this is an internal lock that can achieve seamless connect of wall panels.

30 YEARS LIMITED GUARANTEE RESIDENTIAL

15 YEARS LIMITED GUARANTEE LIGHT COMMERCIAL

NUVA 60x120 cm./23.6”x47.2”

TONGUE&GROOVE

4 Total thickness (mm)

Square edge

YYR relieve

V1 Uniform appearance

B-s3 Fireproof

PACKING	M² / BOX	PIECES / BOX	KG. / BOX	PIECE / M²	M² / PALLET	KG. / PALLET
Nuva 60x120 cm./23.6”x47.2”	2,8799	4	24,18	1,3889	71,9999	604,5

/ Technical information

GENERAL INFORMATION

Descripción	Norma	Resultado
Resistencia al microrayado	EN 16094	≤MSR-A3
Metales pesados	EN12149	No detectado

ENVIRONMENT, SAFETY AND HEALTH

Descripción	Norma	Resultado
Emisión de formaldehído	EN 15102	No detectado
Emisiones de COVs	ISO 16000	VOC A+
Reacción al fuego	EN 13501-1	B -s3

/ Installation

Installing C&F is quick and easy, although it requires to follow the instructions carefully. Incorrect installation will void the product warranty. Check the material and make sure that the edges are straight and undamaged. Claims for surface defects after installation will not be accepted. For aesthetic reasons, we recommend placing the boards perpendicularly to the window and mixing the contents of the different boxes before installation. **Please carefully consult the detailed installation instructions that are to be found in the product boxes and in the technical sheet on our website carefully.**

Installation guide

Partida Rachina, s/n. 12130 San Juan de Moró (Castellón)- España Tel.: +(34) 964 657 400 - Fax:+(34) 964 657 401 - dune@duneceramics.com
www.duneceramics.com